
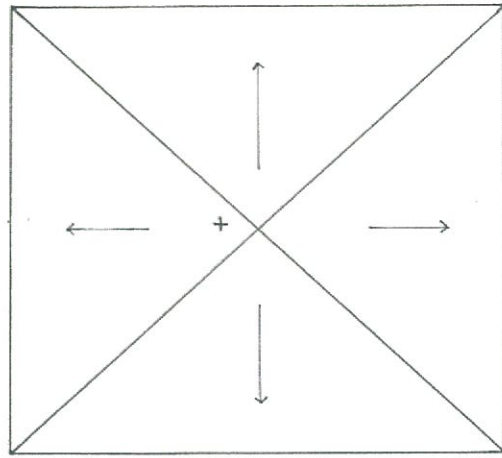


ANCHOR POINTS (TYP)

AVC UNITS (TYP)

ANCHOR POINTS (TYP)

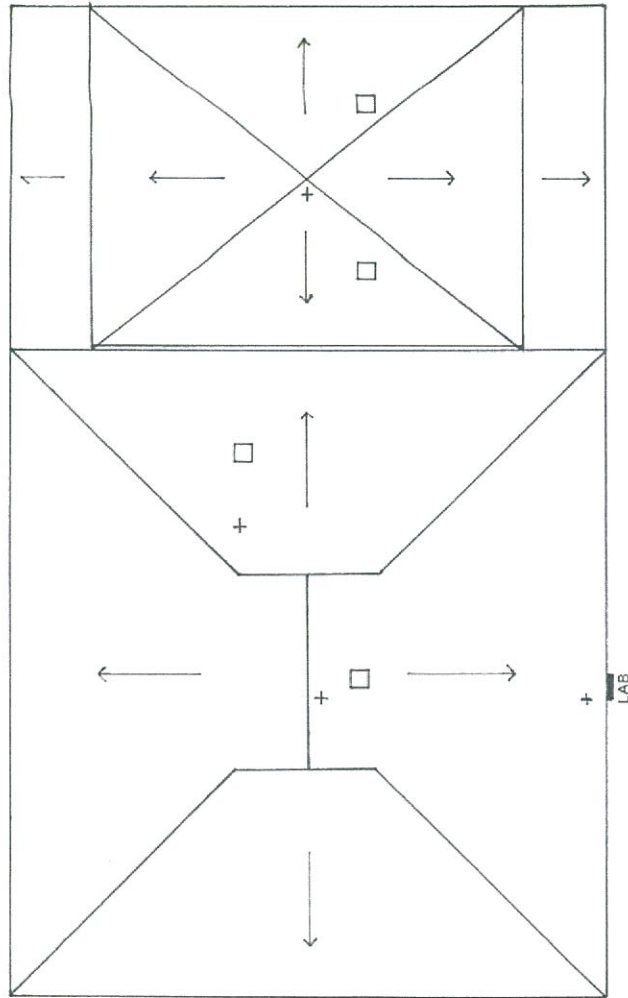


CANTEEN ROOF PLAN

BLOCK "B" ROOF PLAN

NOTES

1. All Fall Prevention Anchorages (FPA's) to comply with AS1891, and must be installed in accordance with manufacturer's recommendations
2. All fixed ladders, stairways and platforms to comply with AS1657
3. All designated access points to be re-entrant, include signage in accordance with AS1319, and have a single anchor point located within 1 metre.
4. All roof access hatches to be lockable and open away from fall hazard.
5. All ladder access brackets to prevent movement in vertical and horizontal planes.

THIS ROOF ACCESS SAFETY SYSTEM IS DESIGNED FOR THE USE OF SAFEMASTER ENERGY ABSORBING ANCHORS ONLY THE USE OF ANY OTHER PRODUCT MAY MEAN THAT THE BUILDING STRUCTURE MUST BE STRENGTHENED		SAFEMASTER 'TRUSSLINK' EYELET DIRECT FIXED TO TIMBER RAFTER OR PURLIN  TIMBER ANCHOR DETAIL		SAFEMASTER PURLINK EYELET DIRECT FIXED TO STEEL PURLIN  STEEL ANCHOR DETAIL		PROJECT		KINGSWAY CHRISTIAN COLLEGE - 157 KINGSWAY, DARCH W.A.			
						LEGEND		DATE AUGUST '05		SCALE 1 : 200	
+		TYP ANCHOR POINT		TYP LADDER BRACKET		DIRECTION OF TRAVEL BETWEEN ANCHOR POINTS		DIRECTION OF ROOF FALL		ROOF ACCESS HATCH	
											
P.O. Box 1373, Canning Vale 6155 45-47 Wittenberg Drive, Canning Vale W.A. 6155 Telephone: (08) 9456 5266 Fax: (08) 9456 5014 ABN 20 461 467 190											