



ANCHOR POINTS (TYP)

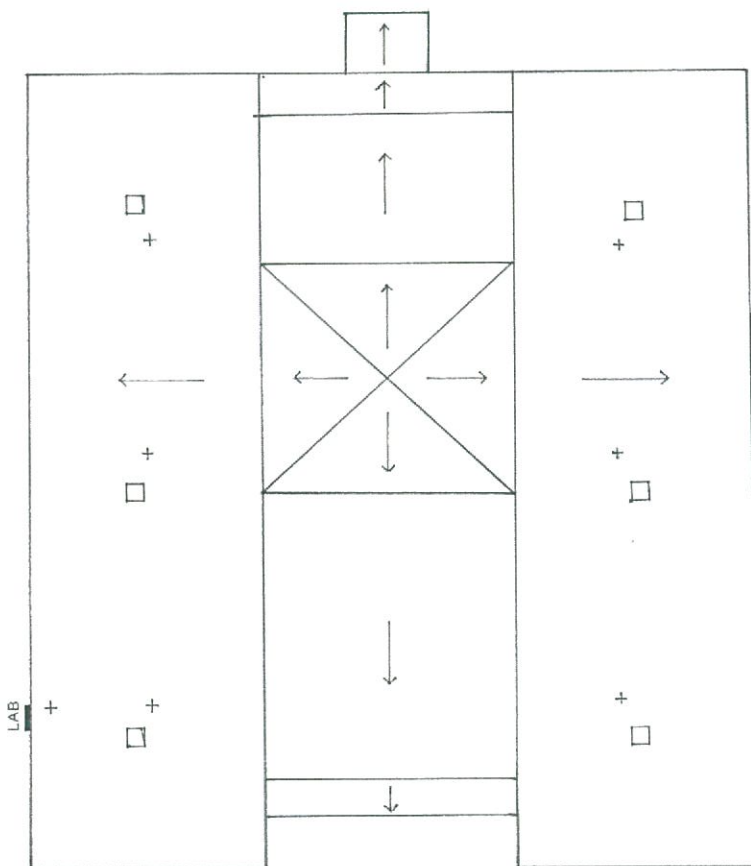

BLOCK "N" ROOF PLAN

A/C UNITS (TYP)

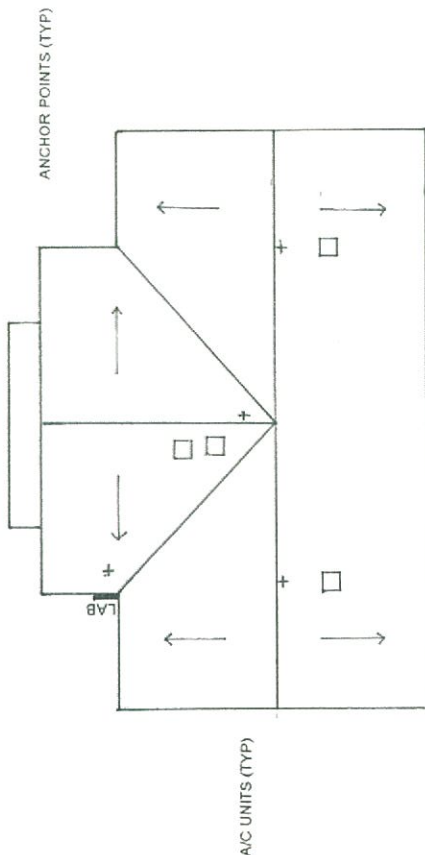

BLOCK "O" ROOF PLAN

NOTES

1. All Fall Prevention Anchorages (FPAs) to comply with AS1891, and must be installed in accordance with manufacturer's recommendations
2. All fixed ladders, stairways and platforms to comply with AS1657
3. All designated access points to be relocatable, include signage in accordance with AS1319, and have a single anchor point located within 1 metre
4. All rod access hatches to be lockable and open away from fall hazard
5. All ladder access brackets to prevent movement in vertical and horizontal planes

PROJECT		KINGSWAY CHRISTIAN COLLEGE - 157 KINGSWAY, DARCH W.A.	
DATE	SCALE	DRAWN	DRAWING No.
AUGUST '05	1 : 200	S.W.	2761
Safemaster SAFETY PRODUCTS P.O. Box 1373, Canning Vale WA 6155 Telephone: (08) 9456 6266 Fax: (08) 9456 5014 ABN 20 461 467 199			
LEGEND		TYP ANCHOR POINT	
+		TYP LADDER BRACKET	
LAB		DIRECTION OF TRAVEL BETWEEN ANCHOR POINTS	
		DIRECTION OF ROOF FALL	
		ROOF ACCESS HATCH	
THIS ROOF ACCESS SAFETY SYSTEM IS DESIGNED FOR THE USE OF SAFEMASTER ENERGY ABSORBING ANCHORS ONLY THE USE OF ANY OTHER PRODUCT MAY MEAN THAT THE BUILDING STRUCTURE MUST BE STRENGTHENED		SAFEMASTER TRUSSLINK EYELET DIRECT FIXED TO TIMBER RAFTER OR PURLIN SAFEMASTER PURLINK EYELET DIRECT FIXED TO STEEL PURLIN DEKTIITE FLASHING TIMBER ANCHOR DETAIL STEEL ANCHOR DETAIL	