



A/C UNITS (TYP)

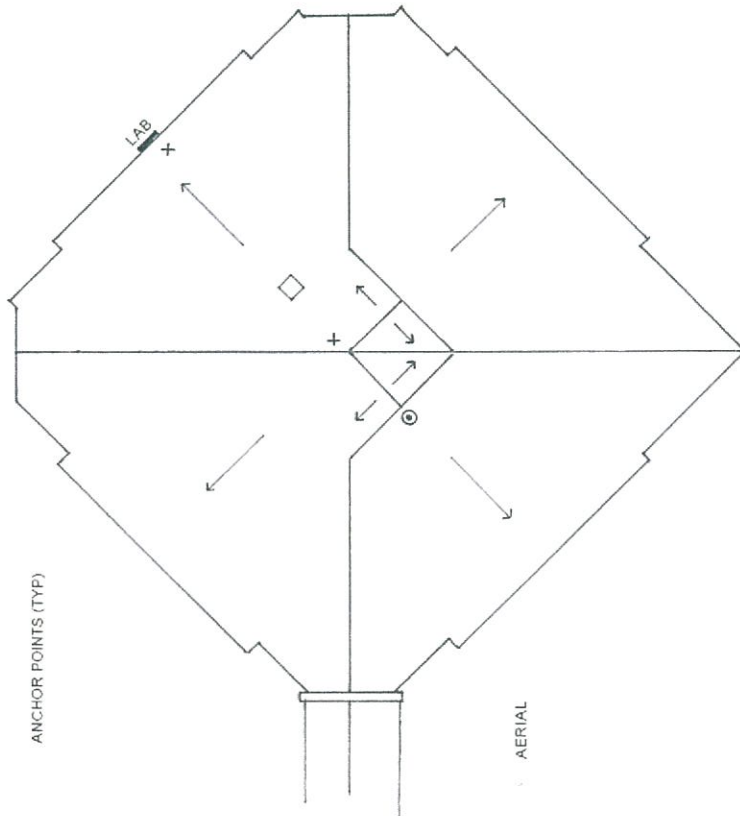

ANCHOR POINTS (TYP)

A/C UNITS (TYP)

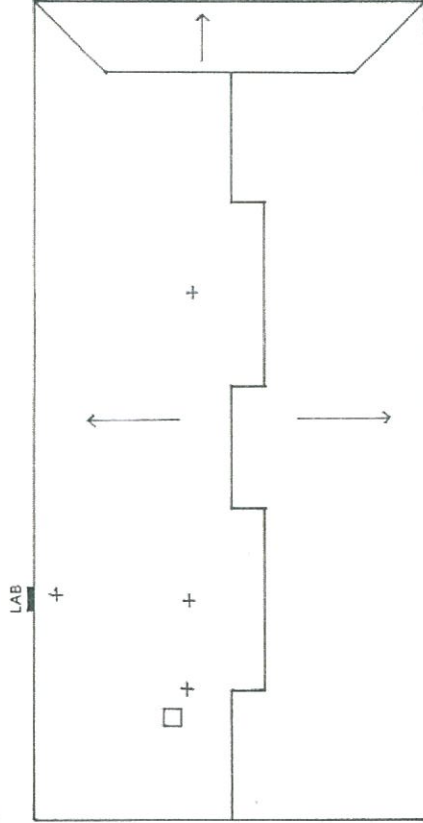

ANCHOR POINTS (TYP)

BLOCK "I" ROOF PLAN

BLOCK "Q" ROOF PLAN


NOTES

1. All Fall Prevention Anchorage (FPA's) to comply with AS1891, and must be installed in accordance with manufacturer's recommendations
2. All fixed ladders, stairways and platforms to comply with AS1657
3. All designated access points to be restrictable, include signage in accordance with AS1319, and have a single anchor point located within 1 metre.
4. All roof access hatches to be lockable and open away from fall hazard.
5. All ladder access brackets to prevent movement in vertical and horizontal planes


THIS ROOF ACCESS SAFETY SYSTEM IS DESIGNED FOR THE USE OF SAFEMASTER ENERGY ABSORBING ANCHORS ONLY

THE USE OF ANY OTHER PRODUCT MAY MEAN THAT THE BUILDING STRUCTURE MUST BE STRENGTHENED

SAFEMASTER TRUSSLINK EYELET DIRECT FIXED TO TIMBER RAFTER OR PURLIN



SAFEMASTER PURLINK EYELET DIRECT FIXED TO STEEL PURLIN



LEGEND

- + TYP ANCHOR POINT
- LAB TYP LADDER BRACKET
- ↔ DIRECTION OF TRAVEL BETWEEN ANCHOR POINTS
- ← DIRECTION OF ROOF FALL
- ⊠ ROOF ACCESS HATCH

PROJECT

KINGSWAY CHRISTIAN COLLEGE - 157 KINGSWAY, DARCH W.A.

DATE

AUGUST '05

SCALE

1 : 200

DRAWN

S.W.

DRAWING No.

2761

P.O. Box 1373, Canning Vale WA 6170
45-47 Wittenberg Drive, Canning Vale W.A. 6155
Telephone: (08) 9456 5666
Fax: (08) 9456 5014



ABN 20 461 487 196